


Small-Signal Fast Switching Diodes

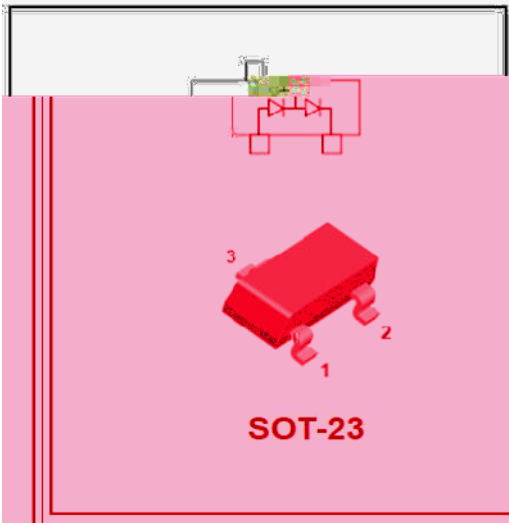

Features

- V_R 100V
- I_{FAV} single diode loaded 215mA
double diode loaded 125mA

Typical Applications

- Low-Leakage

Mechanical Data

- Package: SOT23
- Terminals: Tin plated leads, solderable per J-STD-002 and JEDEC-22-B102
- Marking: JY

■Maximum Ratings ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Repetitive peak reverse voltage	V_{RRM}	V		100
Reverse voltage	V_R	V	$I_R=100\mu\text{A}$	100
Peak forward surge current	I_{FSM}	A	Non-Repetitive $t=1\text{ms}$	4
Average forward current	I_{FAV}	mA	single diode loaded	215
			double diode loaded	125
Power dissipation	P_{tot}	mW		250
Maximum junction temperature	T_j			
6WRUDJH WHP SHUDWXUH	UDQJH		7	WR

■Electrical Characteristics

PARAMETER	Symbol	UNIT	Conditions	Min	Max
Breakdown Voltage	V_R	V	$I_R=100\mu\text{A}$	100	
Forward Voltage	V_F	V	$I_F=1\text{mA}$		0.9
			$I_F=10\text{mA}$		1.0
			$I_F=50\text{mA}$		1.1
			$I_F=150\text{mA}$		1.25
Reverse Leakage Current	I_R	nA	$V_R=75\text{V}$		5
Capacitance	C	pF	$V_R=0\text{V}$, $f=1\text{MHz}$		4
Reverse Recovery Time	T_{rr}	us	$I_F=I_R=10\text{mA}$, U_U , 5/5/		



BAV199

Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAV199	F2	Approximate 0 . 0 0 8	3 0 0 0	3 0	0 0 0	12 0 0 0 0

v627 3DFNDJH 2XWOLQH 'LPHQVLRQV

v627 6XJJHVWHG 3DG /D\RXW



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and malfunction of which would directly endanger human life (such as medical instruments, transport equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, and other safety devices). Yangjie or anyone on its behalf, assumes no responsibility for any damages resulting from such improper use of sale.

This publication supersedes and replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> or consult your nearest Yangjie's sales office for assistance.